

Dinamómetro Electrónico

MiniDin Cables25

Características Técnicas.

Capacidades desde 300 hasta 100.000kg.

Display cristal líquido LCD con 5 dígitos de 25 mm.

Carcasa de acero pintada al horno

Precisión: ±0,05% sobre capacidad máxima

Temperatura de trabajo: desde -20 a 70°C

IP 50

5 indicadores de estado (Cero, Estabilidad, Tara, Signo negativo, Batería)

Apantallamiento contra interferencias

Se suministra con cargador automático y batería recargable de larga duración

Suministro completo de accesorios (2 grilletes y cargador, opcional gancho giratorio con pestillo de seguridad y anilla)


Máxima robustez con mínimo peso

Mínima altura perdida en grúa

Fabricación nacional con control metrológico acreditado nº 01M042




Capacidad (Kg.)	Resolución (Kg.)	Dimensiones (mm.)		Peso (Kg.)
		A		
300	0,1	235		4
500	0,2	235		4
1.000	0,5	235		4,5
2.000	1	260		5
3.200	1	265		5,5
5.000	2	330		7
6.300	2	335		9
10.000	5	350		14
12.000	5	350		15
16.000	5	360		27
20.000	5	580		41
25.000	10	585		44
35.000	10	660		60
50.000	20	850		110
70.000	50	985		180
100.000	100	1.140		320

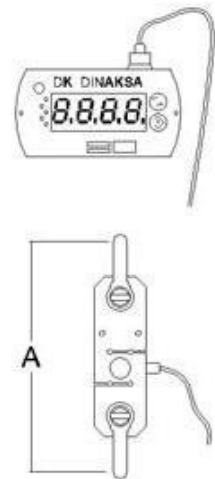

Dinaksa Pesaje Industrial S.L.U. se reserva el derecho de modificar las especificaciones técnicas del producto sin previo aviso

Opciones

- Mando infrarrojo para las funciones OFF, TARA, memoria sumadora, totalizador y borrados
- Mando vía radio para las funciones OFF, TARA, memoria sumadora, totalizador y borrados
- Display números rojos de alta visibilidad
- Servicio 24h: 2 juegos de baterías intercambiables Plug & Play y base de carga Dock Station
- Maleta para gancho pesador.
- Preselección de carga, incluye mando.
- Programa de pico máximo.
- Salidas: RS232, Wifi, Bluetooth
- Carcasa Acero inoxidable
- Otras IP, consultar
- Consúltenos sus necesidades específicas**

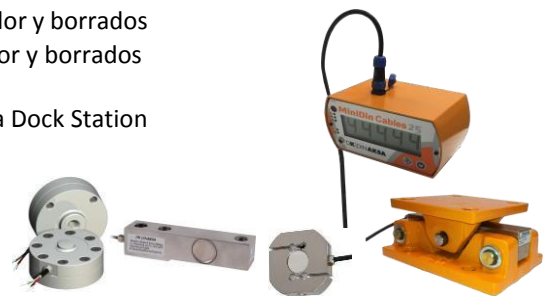

Aplicable a todo tipo de células



Crane Scale **Mini Din Cables25**


Technical Features

Capacity from 300 kg up to 100.000 kg.
 LCD Display with 5 digits 25 mm high.
 Oven-painted steel housing.
 Accuracy: 0.05% on the maximum capacity.
 Working temperature: -10 to +50°C.
 IP 50
 5 status indicators: zero, stability, tare, negative sign, battery.
 Screening against interference.
 Supplied with a long-life rechargeable battery and automatic charger.
 Accessories included: 2 shackles and charger (swivel hook with safety latch and ring are optional).
 Maximum strength with minimum weight.
 Minimum height loss in crane






National manufacturing with accredited metrological control nº 01M042

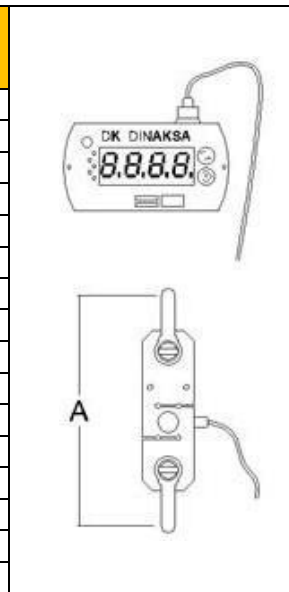Capacity (Kg.)	Resolution (Kg.)	Dimensions (mm.)		Weight (Kg.)
		A		
300	0,1	235		4
500	0,2	235		4
1.000	0,5	235		4,5
2.000	1	260		5
3.200	1	265		5,5
5.000	2	330		7
6.300	2	335		9
10.000	5	350		14
12.000	5	350		15
16.000	5	360		27
20.000	5	580		41
25.000	10	585		44
35.000	10	660		60
50.000	20	850		110
70.000	50	985		180
100.000	100	1.140		320



Options

-  Infrared remote control for the OFF, TARE, adding memory, totalizer and delete functions.
 -  Via radio remote control for the OFF, TARE, adding memory, totalizer and delete functions.
 -  High brightness red LED Display with 5 digits 25 mm. high.
 - 24h service: 2 sets of Plug & Play batteries and Dock Station charging dock.
 - Carrying case for crane scale.
 - Load preselection (includes a remote control).
 - Other IP protection levels, on request.
 - Maximum peak program.
 - RS-232, Wifi and Bluetooth outputs.
 - Stainless Steel housing.
- Contact us for your specific needs.**



Applicable to all kind of cells

